

Teltonika RUT200 - LTE Router

111.9096.01

1. Use

The RUT200 mobile router offers the perfect solution for flexible and fast Internet, especially in regions without a reliable landline connection. With its simple setup, it enables the PQ measurement technology PQI-DA smart / PQI-LV and PQI-DE to be connected quickly. In conjunction with the Wireguard protocol on the devices, the modem enables a secure and fast connection to the central evaluation software WinPQ / WebPQ



2. Technical data


Mobile modules	4G (LTE), 3G, 2G
Antenna connections	2 x SMA for mobile, 1 x RP-SMA for WiFi
Ethernet connections	2 x 10/100, 1 x WAN, 1 x LAN
VPN and Tunneling	OpenVPN, WireGuard

3. General properties

Operating system	RutOS (OpenWrt based on Linux OS)
CPU	Mediatek MIPS 24Kc 580 MHz
Dimensions (W x H x D)	83 x 25 x 74 mm
weight	125g


4. Connection

4.1 Front view

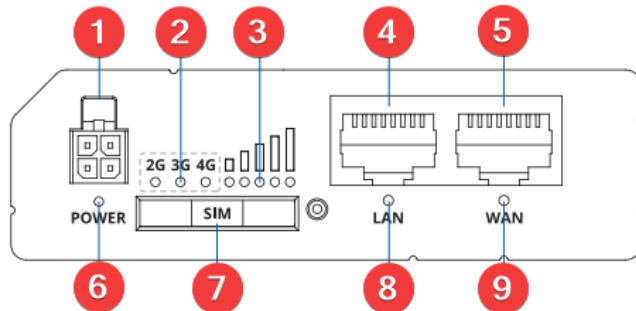

1. Power supply
2. Type of mobile signal
3. Signals strength
4. LAN port
5. WAN port
6. Power LED
7. SIM slot
8. LAN LED
9. WAN LED

4.2 Rear view

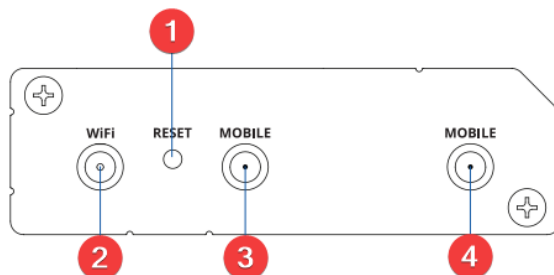

1. Reset button
2. WIFI Antennas (Female)
3. Mobile radio antenna AUX (Female)
4. Mobile radio antenna Main (Female)

5. Web server for setup

Default IP address: <http://192.168.1.1/login>
Login data: Type plate on the device

We'll sort it out.

6. Additional accessories that can be ordered

Accessoires	IDENT no.
LTE antenna with 3m connection cable Frequency range 2.4 - 2.5Hz; Cable: RG174, 3000mm; Connector: RP-SMA Male	111.9096.02
Top-hat rail adapter RUT200 Mounting standard: 35mm DIN; Material: ABS+PC plastic	111.9096.03

A. Eberle GmbH & Co KG

Frankenstraße 160
D-90461 Nuremberg

Phone: +49 (0) 911 / 62 81 08-0

Fax: +49 (0) 911 / 62 81 08 96

E-mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 7/26/2024 12:56

Copyright 2024 by A. Eberle GmbH & Co. KG

Subject to change without notice.